


EPS Code                    1245463-1

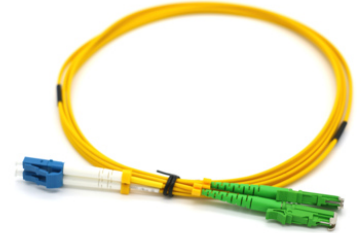

### Product Specifications

Insertion loss	0.25 dB
Return loss	45dB
Repeatability	0.1 dB
Durability	plug and unplug 1000 times
Interface	LC/PC - E2000/APC
Installation temperature	-40 °C to +85 °C
ROHS compliant	yes
Fiber mode	singlemode

### Ordering Information

Color	yellow
Length	1m